


Fully Adhered Membrane - Insulation (RB) - Existing Roof - Concrete Deck (Recover)

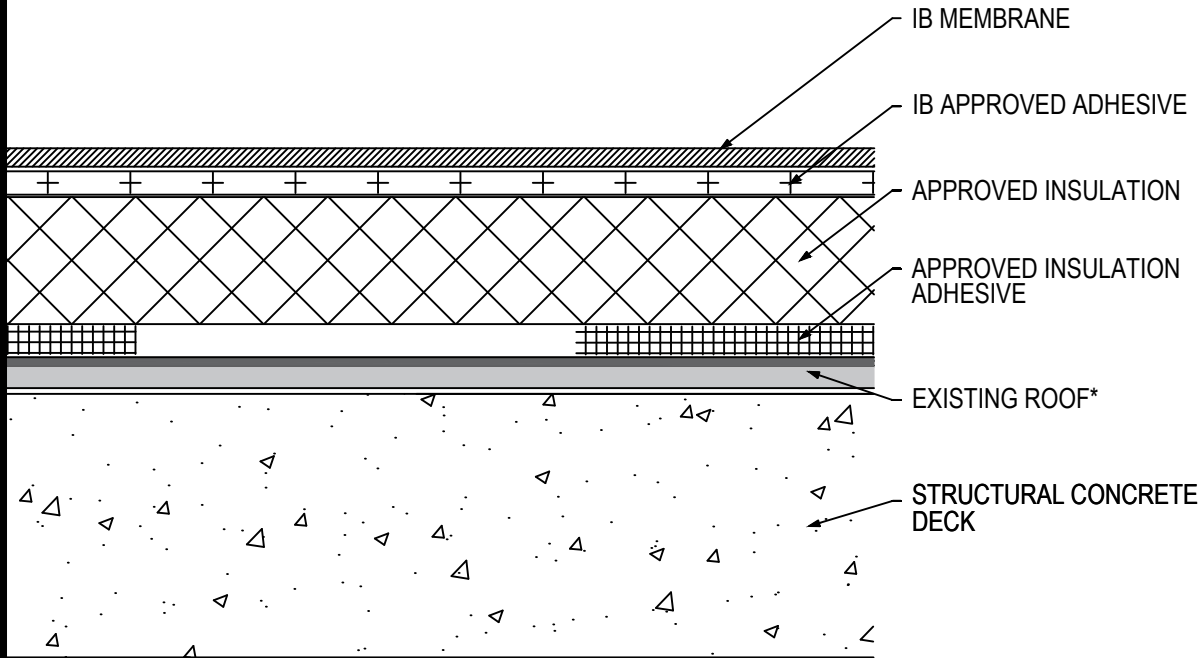

Fire Rating / Max. Slope	Deck Type	Insulation (over Existing Asphaltic Roof)			IB Membrane Attachment	Max. Design Pressure**
		Type	Insulation Adhesive	Pattern		
☐ 1Class 'A' 3":12"	Structural Concrete	1" Approved Insulation	BM, CR20	Four continuous ribbons, 12" o.c.	IB Approved Adhesive	-272.5 psf (Class 555)
☐ 1Class 'A' 3":12"	Structural Concrete	1" Approved Insulation	OB500, OSFA, PG1, or RSIA	Four continuous ribbons, 12" o.c.	IB Approved Adhesive	-327.5 psf (Class 655)

Existing Roof: APP or SBS modified bitumen, smooth or granule surfaced asphaltic built-up roof only

Approved Insulation: IB EnergyBoard II or III, H-Shield or H-Shield CG

Approved Insulation Adhesive: BM = Polyset BoardMax, CR-20 = Polyset CR-20, OB500 = OlyBond 500 Adhesive Fastener, OSFA = Millennium One-Step Foamable Adhesive; PG-1 = Millennium PG-1 Pump Grade Adhesive; or RSIA = IB Rapid Set Insulation Adhesive; maximum bead spacing 12" o.c. unless otherwise indicated.

Fire Classification Note(s): ¹UL Class A up to 3":12" when utilized with IB EnergyBoard II or AC Foam II, any thickness, over an existing insulated or non-insulated cap, sheet smooth or gravel surfaced (loose gravel may be removed). ²UL Class A up to 1/2":12" when utilized with one layer of 3" or two layers of 1.5" H-Shield CG, over an existing Class A, B or C roofing system (gravel may be removed from gravel built-up or ballasted single-ply system).

³UL Class B up to 1/2":12" when utilized with minimum 1.9" H-Shield CG over an existing Class A, B or C roofing system (gravel may be removed from gravel built-up or ballasted single-ply system). ⁴The use of other IB Approved Insulations or lesser thicknesses may not retain Classification.

** Refer to Substrate Resistance table for required pull-out values.

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Specifications Manual. For Technical Services please contact us at 800-426-1626.

Membranes:	Membrane Color:	Warranty Length***	Warranty Type***
☐ IB PVC Single-Ply 50 Mil	☐ White* ☐ Gray ☐ Tan ☐ Bronze ☐ ChemGuard*	☐ 10 Year ☐ 15 Year ☐ 20 Year	☐ Total System - No Dollar Limit (NDL)
☐ IB PVC Single-Ply 60 Mil	☐ White* ☐ Cool Sand* ☐ Cool Stone* ☐ Gray ☐ Tan	☐ 15 Year ☐ 20 Year ☐ 25 Year	☐ Warranty Plus (WP)
☐ IB PVC Single-Ply 80 Mil	☐ White* ☐ Gray ☐ Tan ☐ Bronze ☐ ChemGuard*	☐ 15 Year ☐ 20 Year ☐ 25 Year	☐ Commercial Limited Material Warranty (CLMW)
			☐ Residential Limited Material Warranty (RLMW)

* Meets CRRC, Title-24, & EnergyStar Standards

*** Refer to Warranty Selection Guide for Warranty Riders, Term Length Limitations, and eligibility requirements of the Warranty Program

Submitted By:

Address:

Email:

Project Name:

Address: