



## Product Description:

IB® PVC Pitch Pans are fabricated from IB® PVC Clad Metal constructed with a 24-gauge, G90 coated galvanized sheet metal with a durable 45-mil non-reinforced IB PVC film with acrylic finish, laminated to the top surface.

A factory welded; reinforced IB® PVC Single Ply target flashing is bonded to the clad which allows for easy application over the newly installed IB roof system. They are intended to be used in conjunction with M-1 Sealant and One-Part Pourable Penetration Sealant or filled with IB® Sealer.

## Features:

- Split pan format for ease of installation
- Factory welded reinforced membrane target
- Integral flanges for securement
- Custom orders available for a variety of membrane thicknesses and color options

## Packaging:

Sold as individual units.

## Available Clad Metal Colors:

Standard Clad Finish in White, Bronze, Tan, and Gray



|       |        |     |      |
|-------|--------|-----|------|
|       |        |     |      |
| White | Bronze | Tan | Gray |

## Available Membrane Colors:

|        |           |            |             |
|--------|-----------|------------|-------------|
|        |           |            |             |
| White  | Cool Sand | Cool Stone | ChemGuard   |
|        |           |            |             |
| Bronze | Gray      | Tan        | Terra Cotta |

## Application:

Refer to IB Specifications and Construction Details for installation requirements and additional information for approved substrates and specific uses. IB® PVC Pitch Pans are intended to be used in conjunction with M-1 Sealant (sold separately) and One-Part Pourable Penetration Sealant (sold separately), or IB® Sealer (sold separately). IB PVC Pitch Pans must be secured in place over the installed membrane with IB® Fasteners approved for the substrate type. Split pan seams must be sealed with a continuous bead of M-1 Sealant or IB® Sealer and closed with pop-rivets spaced approximately 1" o.c. (not supplied).

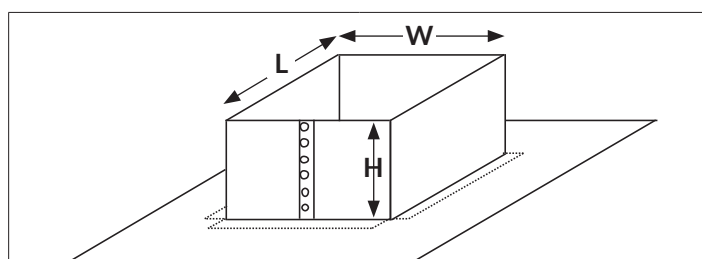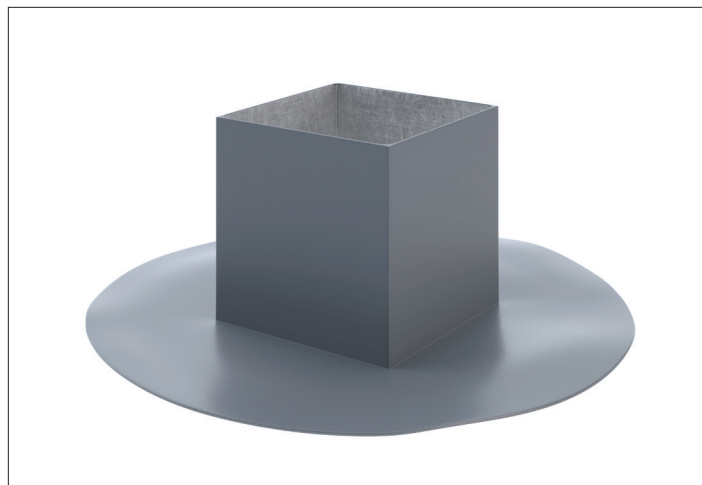

### Required Information for Ordering Custom Pitch Pan Fabrication

|                                      |  |
|--------------------------------------|--|
| Color                                |  |
| Pan Length Upper                     |  |
| Pan Width Upper                      |  |
| Pan Height                           |  |
| Split (Y/N)                          |  |
| Custom Membrane Target Flashing Size |  |
| Quantity                             |  |
| Special Instructions:                |  |

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

Go to <https://ibroof.com/tds> for the most up-to-date version of this document.

Toll Free: 800-426-1626

Care has been taken to ensure that the contents of this publication are accurate, however IB Roof Systems and any subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working, are for information only and IB Roof systems and any subsidiary accept no responsibility in respect thereof.