

IB® PVC STAINLESS STEEL METAL SCUPPER IB® PVC CLAD METAL SCUPPER



Product Description:

IB® Clad Stainless Steel Metal Scupper is custom fabricated from IB® PVC Clad Stainless Steel Metal constructed with a 24-gauge, SAE 304 stainless steel sheet metal with a durable 45-mil non-reinforced IB PVC film with acrylic finish, laminated to the top surface.

IB® Clad Metal Scupper is custom fabricated from IB® Clad Metal constructed of a 24-gauge, ASTM A653-09, CS Type B, G90 coated galvanized sheet metal with a durable 45-mil non-reinforced IB PVC film with acrylic finish, laminated to the top surface.

Made to exact specification and finished with factory welded, non-reinforced 60-mil PVC target flashing.

Features:

- Large metal flanges are incorporated for securement to suitable substrates using approved fasteners
- Custom factory fabricated flashing eliminates the errors of a field fabricated drain
- Simple and easy to install

Sizes:

All scuppers are custom made to order

Packaging:

Sold in individual units

Available Clad Metal Colors:

Standard Clad Finish in White, Bronze, Tan, and Gray

White	Bronze	Tan	Gray

Also available in 24-gauge Clad SAE 304 stainless steel (White only)


Available Membrane Colors:

White	Cool Sand	Cool Stone	ChemGuard
Bronze	Gray	Tan	Terra Cotta

Application:

Install scupper in accordance with IB Specifications and Construction Details.

1. Position scupper to ensure positive drainage through the prepared opening

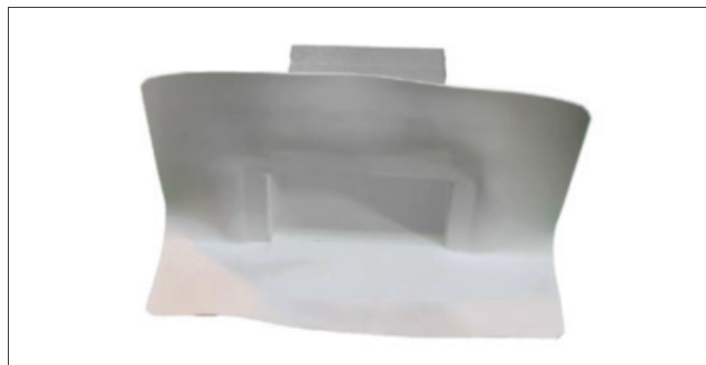

2. Install a minimum of two approved fasteners per flange (8 fasteners per scupper) to the substrate.
3. Clean off residue, dirt or other contamination from the bottom of the scupper and the roof surfaces
4. Hot air weld the perimeter target. Extend scupper body beyond outer wall line (minimum of 1") and provide a watertight seal.
5. Install galvanized metal face plate or conductor head with downspout.

Required Information for Ordering Custom Pitch Pan Fabrication

Standard Through Wall Scupper		Through Wall Box Scupper with Drop Drain & Overflow Cut-Out	
1 Sided or 2 Sided Clad		1 Sided or 2 Sided Clad	
Metal Color		Metal Color	
Membrane Skirt Color		Membrane Skirt Color	
Height		Height	
Width		Width	
Length		Length	
		Overflow Height Opening	
		Overflow Width Opening	
		Drain Length	
		Drain Diameter	
		Center of Drain to Front Scupper Opening	

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

Go to <https://ibroof.com/tds> for the most up-to-date version of this document.

Toll Free: 800-426-1626

Care has been taken to ensure that the contents of this publication are accurate, however IB Roof Systems and any subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working, are for information only and IB Roof systems and any subsidiary accept no responsibility in respect thereof.



Quality Products



Exceptional Service



Technical Expertise

IBroof.com

510810024 V.1 7/20/26