



### Product Description:

IB TPO Walk Tread is made from a durable, 150-mil thick thermoplastic polyolefin, (TPO) membrane featuring a textured finish and smooth underside for easy heat-welding to the IB TPO membranes.


### Use:

- Used as a designated walkway around rooftop equipment in high-traffic areas
- Texturized surface provides a high-traction, safer, and stable walkway

### Thickness:

150 mil – textured membrane

### Available Colors:



### Sizes:


30" x 50'

### Packaging:

- Supplied in an individual roll
- Weight = 58 lbs./roll

### Application:

Refer to IB TPO Specifications and Construction Details for installation requirements and additional information for specific uses. Prior to application, use the IB TPO Cleaner to ensure no oil, dirt, moisture, or other contaminants that could adversely affect the adhesion. After the membrane has been cleaned, lay the IB TPO Walk Tread onto the TPO membrane with the textured side facing up. Cut the pads into manageable lengths and allow them to relax before installation. For best results, install the walk tread in maximum lengths of 10 feet, with an approximate 6-inch-wide space between each section to promote proper drainage. Avoid placement location does not impede water flow and cause ponding. Do not install walk tread over membrane seams or penetration flashings. Heat-weld the edges of each walk tread section to the TPO membrane, leaving one or two 1-inch gaps on the low side to allow moisture to escape. For optimal appearance, apply it when the ambient temperature is between 60°F and 80°F. Adjust welder settings as needed based on the weather conditions.

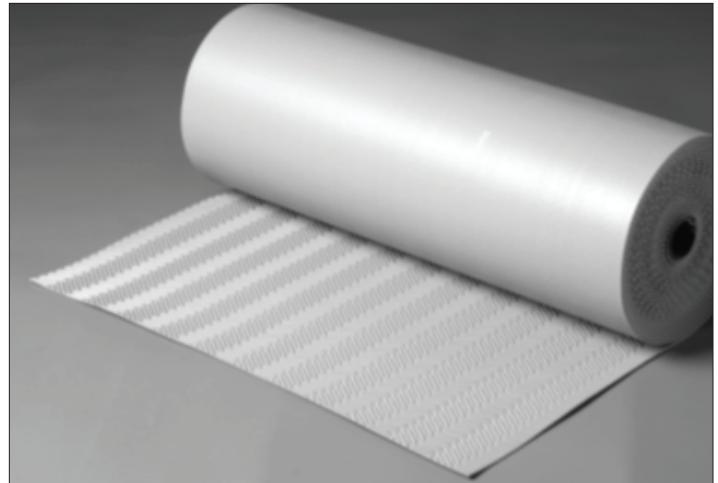

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

Refer to [www.ibroof.com](http://www.ibroof.com) for additional installation instructions. Membranes must not be applied during adverse weather or without precautionary measures in temperatures below 40°F (4°C). All surfaces should be clean, dry, free of dirt, dust, debris, oils, soaps, coatings, and other contaminants that may inhibit bonding.

### Storage:

Store IB TPO Walk Tread indoors, out of direct sunlight, in original unopened containers and away from objects that could cause physical damage or create punctures as well as ignition sources. The membrane is flammable and will catch fire when exposed to open flame.

### Safety Precautions:

Use proper equipment and assistance when moving, lifting, handling, or transporting membrane rolls to avoid personal injuries as well as damage to the membrane. Refer to the Product Safety Data Sheet for additional safety information.

Go to <https://ibroof.com/tds> for the most up-to-date version of this document.

Toll Free: 800-426-1626

Caution has been taken to ensure that the contents of this publication are accurate, however IB Roof Systems and any subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working, are for information only and IB Roof Systems and any subsidiary accept no responsibility in respect thereof.



Quality Products



Exceptional Service



Technical Expertise

**IBroof.com**

510910033 1/16/2026