



Product Description:

IB TPO Clad Metal Overflow Scupper are custom fabricated from IB TPO Clad Metal constructed of a 24-gauge, ASTM A653-09, CS Type B, G90 coated galvanized sheet metal with a durable 30-mil non-reinforced IB TPO film laminated to the top surface.

IB TPO Clad Stainless Steel Metal Overflow Scupper are custom fabricated from IB TPO Clad Stainless Steel Metal constructed with a 24-gauge, SAE 304 stainless steel sheet metal with a durable 30-mil non-reinforced IB TPO film laminated to the top surface.

Each overflow scupper is made to your exact specification and is finished with a factory welded, non-reinforced 60-mil IB TPO Single Ply target flashing that allows for easy application over the newly installed IB roof system. The scuppers incorporate large metal flanges for securement to suitable substrates using approved fasteners.

Features:

- Custom factory fabricated flashing eliminates the errors of a field fabricated drain
- Easily attachable to the substrate
- Simple and easy to install from rooftop

Available Clad Colors:



**Gray and tan are special order only*

Also available in 24-gauge Clad SAE 304 stainless steel



Available Membrane Colors:




**Gray and tan are special order only*

Sizes:

All scuppers are custom made to order.

Packaging:

Sold in individual units

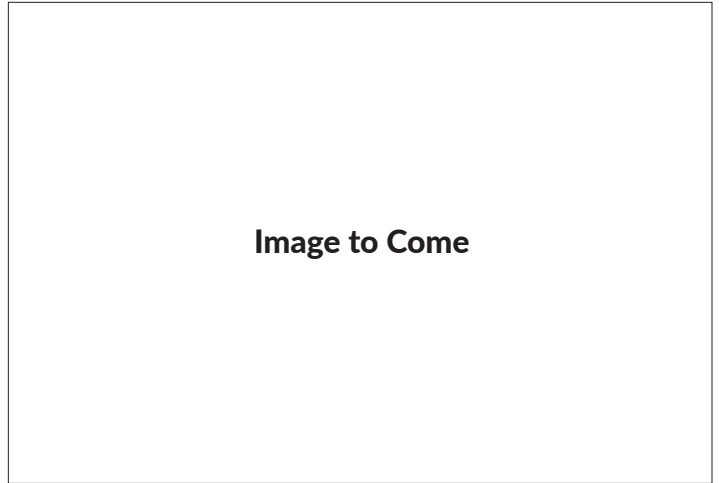

Required Information for Ordering Custom Scupper Fabrication	
Image to Come	
Standard Through Wall Overflow Scupper	
Metal Type	
1 Sided or 2 Sided Clad	
Metal Color	
Membrane Skirt Color	
Height	
Width	
Length	
Overflow Height Opening	
Overflow Width Opening	
Special Instructions:	

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

Application:

Position scupper to ensure positive drainage through the prepared opening and install a minimum of two approved fasteners per flange (8 fasteners per scupper) to the substrate. Clean off any residue, dirt or other contamination from the bottom of the scupper and the roof surfaces and hot air weld the perimeter target. Extend scupper body beyond outer wall line (minimum of 1") and provide a watertight seal. Install galvanized metal face plate or conductor head with downspout.

Refer to www.ibroof.com for additional installation instructions. Membranes must not be applied during adverse weather or without precautionary measures in temperatures below 40°F (4°C). All surfaces should be clean, dry, free of dirt, dust, debris, oils, soaps, coatings, and other contaminants that may inhibit bonding.



Storage:

Store IB TPO Clad Metal Overflow Scuppers indoors, out of direct sunlight, in original unopened containers and away from objects that could cause physical damage or create punctures as well as ignition sources. The membrane is flammable and will catch fire when exposed to open flame.

Safety Precautions:

Use proper equipment and assistance when moving, lifting, handling, or transporting membrane rolls to avoid personal injuries as well as damage to the membrane. Refer to the Product Safety Data Sheet for additional safety information.

Go to <https://ibroof.com/tds> for the most up-to-date version of this document.

Toll Free: 800-426-1626

Care has been taken to ensure that the contents of this publication are accurate, however IB Roof Systems and any subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working, are for information only and IB Roof systems and any subsidiary accept no responsibility in respect thereof.



Quality Products



Exceptional Service



Technical Expertise

IBroof.com

510910012 1/26/2026