


IB Silicone Coating – Existing Roof – aged PVC Single Ply

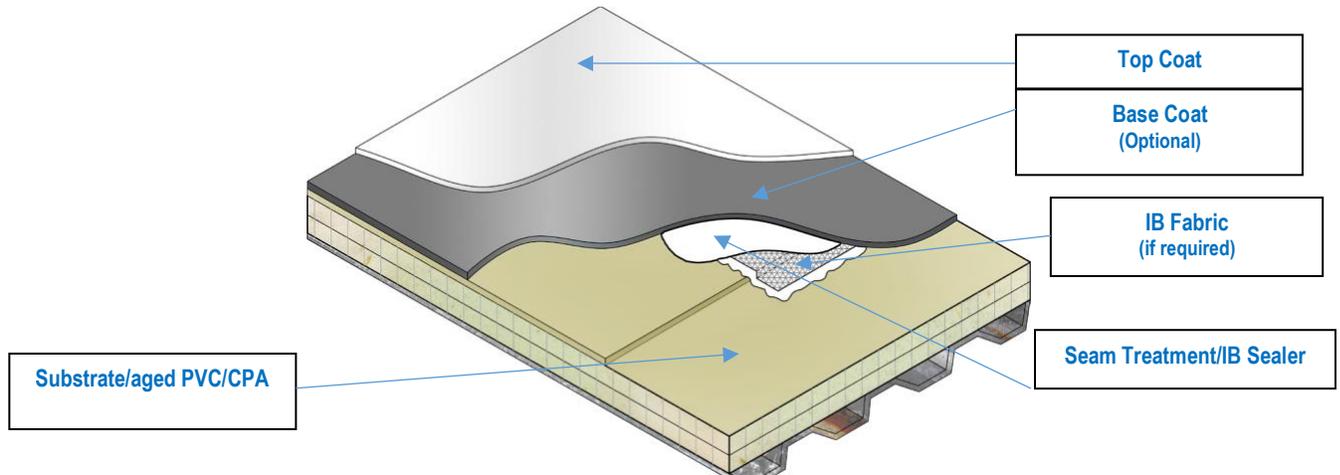

Labor Steps	Step 1	Step 2	Step 3
	Clean Roof	Seam Treatment	Reflective Coat
Product			

SIL-EX-PVC					
Spec #	Step 1	Step 2	Step 3	Required Dry Mil Thickness (Silicone)	Warranty Length
	Surface Preparation IB Roof Cleaner Concentrate (diluted 9:1)	Seam Treatment IB Sealer	Reflective Coat* IB Silicone Coating		
SIL-EX-PVC-5	1 gal/150 sq. ft.	55 Wet Mills	1.25 gal/square	18	5 year
SIL-EX-PVC-10	1 gal/150 sq. ft.	55 Wet Mills	1.5 gal/square	21	10 year
SIL-EX-PVC-12	1 gal/150 sq. ft.	55 Wet Mills	1.75 gal/square	25	12 year
SIL-EX-PVC-15	1 gal/150 sq. ft.	55 Wet Mills	2.0 gal/square	28	15 year

*Silicone coating may be applied in one (1) or two (2) coats (two passes).

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Coating Specifications Manual. For Technical Services please contact us at 800-426-1626.

Note: Coverage rates may vary due to substrate porosity and/or irregularity of the roof surface.

Reflective Coating	Colors	Warranties
<input type="checkbox"/> IB Silicone Coating (Reflective Coat)	<input type="checkbox"/> White <input type="checkbox"/> Gray <input type="checkbox"/> Tan	<input type="checkbox"/> Warranty Plus <input type="checkbox"/> Limited Material
Submitted By: Company: Email:	Project Name: Address:	