



Product Description:

IB® PVC Pipe Flashings feature a factory fabricated, dielectrically welded reinforced IB PVC Single Ply base and a 60-mil non-reinforced IB PVC Single Ply upper. IB® PVC Pipe Flashings are designed for easy installation to reduce roof top labor and call backs by reducing workmanship errors. They are available in a variety of profiles and sizes (refer to chart for more information).

Use:

IB® PVC Pipe Flashings are typically installed around roof top penetrations such as pipe, conduit, gas lines, and other circular profile penetrations and flashings.

Custom pipe flashings can be made to your size specifications.

Note: IB® PVC Pipe Flashings are not intended to function as an exhaust vent or moisture relief vent.

Packaging:


IB® PVC Pipe Flashings are shipped in cardboard boxes according to size.

Available Colors:

White	Cool Sand	Cool Stone	ChemGuard
Bronze	Gray	Tan	Terra Cotta

Application:

Install in accordance with IB Specifications and Construction Details.

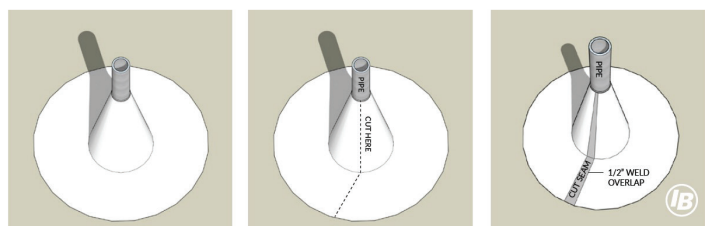

IB® PVC Pipe Flashing Product Data Information

Flashing Type	Target Base Size	Bottom Diameter	Top Diameter	Height	Pipe Size	Box Qty
Short A Cone	14"	3-1/4"	1/4"	5-1/2"	1/4" to 1"	25
Split Short A Cone	14"	3-1/4"	1/4"	5-1/2"	1/4" to 1"	25
A Cone	15"	4-1/2"	1"	8-1/2"	1" to 2-3/8"	25
B Cone	15-1/2"	5-1/4"	2-3/8"	10-1/2"	2-3/8" to 4"	25
C Cone	17"-1/2"	8"	4"	10-1/2"	4" to 7-1/2"	10
D Cone	23"	12"	7-1/2"	9"	7-1/2" to 9-1/2"	20
E Cone	28"	18"	9-1/2"	12"	9-1/2" to 11-1/2"	10
> E Cone	Custom made to order					
4" Oval 0 to 5" Cone	22"	6" x 10"	3" x 6"	5"	-	25
4" Round 0 to 5" Cone	21"	6" x 10"	3" x 6"	5"	-	25
6" Round 0 to 5" Cone	25"	6" x 10"	3" x 6"	5"	-	25
8" Round 0 to 5" Cone	24"	6" x 10"	3" x 6"	6-1/2"	-	25
No Cone	Custom made to order					

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

Go to <https://ibroof.com/tds> for the most up-to-date version of this document.

Toll Free: 800-426-1626

Care has been taken to ensure that the contents of this publication are accurate, however IB Roof Systems and any subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working, are for information only and IB Roof systems and any subsidiary accept no responsibility in respect thereof.



Quality Products



Exceptional Service



Technical Expertise

IBroof.com

510810019 V.1 7/20/26