



### Product Description:

IB Energy Board II Tapered is a closed-cell polyisocyanurate foam core integrally bonded to non-asphaltic, fiber-reinforced organic felt facers. IB Energy Board II Tapered is offered in a variety of slopes, to achieve positive drainage as well as Long-Term-Thermal-Resistance (LTTR) values.

### Features:

- Excellent LTTR to thickness ratio
- Sustainable Building Material
- Zero Ozone Depletion Potential (ODP) from blowing agent
- Virtually no Global Warming Potential (GWP)\*
- Reduces cooling and heating loss transmission through roofing assemblies
- Covered component under the IB Total Systems Warranty
- Can be used for mechanically attached, induction attached, fully adhered, or ballasted roof assemblies

### Packaging:

IB Energy Board II Tapered is shrink-wrapped and job site delivered.


Available in 4' x 4' panels with 1/8", 1/4", and 1/2" per foot slope - Number of panels per pallet various based on thickness.

### Approvals:

- ASTM C1289, Type II, Class 1, Grade 2 (20 psi) or Grade 3 (25 psi)
- FM Standard 4450/4470 Approved
- GWP of IB Energy Board II Tapered is negligible and is considered zero (0) by the U.S. EPA.
- Miami-Dade County Approved
- State of Florida Product Approval (FL2534)
- UL Standard 263 (ASTM E119) Fire Resistance Classification
- UL Standard 790 (ASTM E108) Roofing Systems Classification
- UL Standard 1256 Classification Construction
- UL Standard 1897 Uplift Resistance



MIAMI-DADE COUNTY  
APPROVED

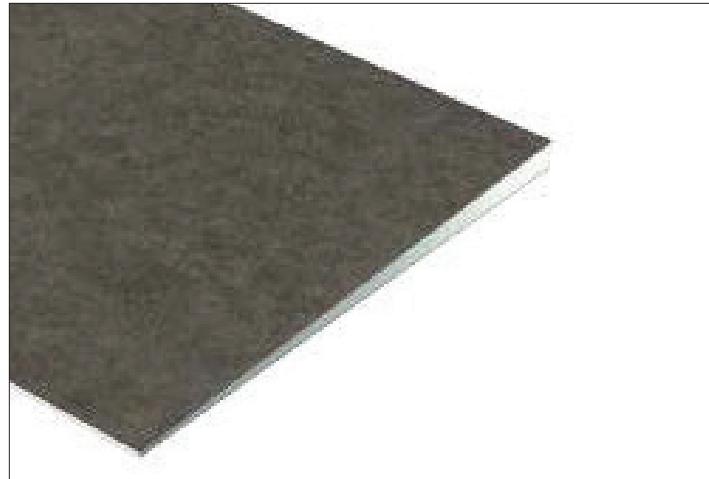

Refer to SDS for more information concerning Ozone Depletion Potential. IB Energy Board is trademark of IB Roof Systems. IB Energy Board II Tapered is also designated with suffixes of A, H, or J to designate its point of origin within the IB Roof System distribution network.

Product details stated are nominal as manufactured, and the results of tests and/or calculations and therefore are non-binding and do not represent a guarantee or warranted characteristics. User and/or designer are responsible for confirming suitable performance for specific application and conforming with all applicable laws and regulations.

Typical Physical Properties*		
Property	Test Method	Result (nom)
Dimensional Stability	ASTM D2126	< 2%
Compressive Strength	ASTM D1621	20 psi or 25 psi
Water Absorption	ASTM C209 & D2842	< 1.5%
Water Vapor Transmission	ASTM E96	< 1.5 perm
Product Density	ASTM D1622	2.0 pcf
Flame Spread	ASTM E84 (10 min.)	< 75
Smoke Development	ASTM E84 (10 min.)	< 450
Tensile Strength	ASTM D6123	730 psf
Service Temperature		-100° to 250°F

\*Numerical ratings are not intended to reflect performance under actual fire conditions. Flame spread index of  $\leq 75$  and smoke development  $\leq 450$  meet code requirements for foam plastic roof insulation. Codes exempt foam plastic insulation when used in FM 4450 or UL 1256.

\* Physical properties shown are based on data obtained under controlled conditions and are subject to normal manufacturing tolerances.

Slope	Label	Thickness	Avg. ¹LTTR	Qty / Pallet	SF / Pallet	Bd Ft / Pallet
1/8"	AA	0.5"-1.0"	4.3	64	1024	768
1/8"	A	1.0"-1.5"	7.1	38	608	760
1/8"	B	1.5"-2.0"	10.0	26	416	728
1/8"	C	2.0"-2.5"	12.9	20	320	720
1/4"	X	0.5"-1.5"	5.7	48	768	768
1/4"	Y	1.5"-2.5"	11.4	24	384	768
1/2"	Q	0.5"-2.5"	8.6	32	512	768

<sup>1</sup>LTTR (long term thermal resistance) values were determined in accordance with CAN/ULC-S770 at 75°F (24°C). Test samples were third-party selected and tested by an accredited material testing laboratory.

Note: Other sizes and slopes are available by special order with minimum order quantities.



## Application:

Refer to IB Specifications and Construction Details for additional installation instructions.

## Multi-Layer Installation:

Improved insulation thermal performance and a reduction of thermal bridging can be obtained by the installation of two or more layers with all joints offset. Avoid continuous vertical joints on all multi-layer applications by staggering and offsetting the joints of each layer from those of preceding layers.

## Storage & Limitations:

Insulation must be protected from open flame and always kept dry. Store above ground on pallets and cover with breathable tarpaulins. Install only as much insulation as can be covered the same day with the completed roofing system. Do not leave exposed.

Go to <https://ibroof.com/tds> for the most up-to-date version of this document.

Toll Free: 800-426-1626

Care has been taken to ensure that the contents of this publication are accurate, however IB Roof Systems and any subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working, are for information only and IB Roof systems and any subsidiary accept no responsibility in respect thereof.



Quality Products



Exceptional Service



Technical Expertise

**IBroof.com**

510810044 1/27/2026